

My ref:	ROC 13 – 2021/22	Tel:	012 358 9247
Your ref:		Cell:	083 277 9541
Contact person:	Mr. Steven Macheve	Email:	StevenMa@TSHWANE.GOV.ZA
Division/Section/Unit:	Regional Operational and Coordination & Environmental and Agricultural Management		

Messrs. **SITHEMBE TRANSPORTATION AND PROJECTS (PTY) LTD**
(REGISTRATION NUMBER: **2013/029173/07**) (VENDOR: -)
12 BAUHINIA STREET
NO. 7 STANFORD OFFICE
CENTURION
0157
(Attention: Mr. Muzi Lukhele)

31 March 2023

Sir/Madam

TENDER FOR THE MAINTENANCE OF BALUSTRADES, BARRIERS, RETAINING WALLS, BOLLARDS AND STEEL STRUCTURES AS WELL AS UPDATING THE INVENTORY ON THE STREET FURNITURE MANAGEMENT SYSTEMS, AS AND WHEN REQUIRED, ON TENDERED RATES AND SUBJECT TO AVAILABLE BUDGET: THREE (3) YEAR PERIOD: WITH EFFECT FROM 01 APRIL 2023 OR NEAREST DATE

1. I have the pleasure to inform you that, **subject to the following**,

- the successful registration as a vendor with the City of Tshwane within 14 days,
- the signing of an SLA with the relevant Department within 14 days after commencement of work, and
- failure to sign the SLA with the City of Tshwane within the stipulated period may result in the termination of your appointment,

your tender has been accepted by the City of Tshwane for the maintenance of balustrades, barriers, retaining walls, bollards and steel structures as well as updating the inventory on the street furniture management systems, as and when required, on tendered rates and subject to available budget, over a three (3) year period, with effect from 01 April 2023 or nearest date, as per the attached Annexure A.

All in accordance with the Municipality's Specification and Conditions of Tender and your tender.

2. All other requirements and information concerning this contract can be obtained from Mr. Steven Macheve at telephone (012) 358 9247.



3. Your appointment is also subject to your company submitting a detailed proposal within one month on the following:
 - No. of jobs to be created through this project;
 - Spin offs to the Local Economy;
 - Strategy for appointment of Locals.
4. Information regarding insurance is obtainable from the Office of the Chief Financial Officer, attention: Ms. Morongwa Mokoena at telephone number (012) 358 1126.


Please submit, to the relevant department, every 3 months, proof by your company that all municipal rates and taxes or Municipal service charges owed by your company or any of the directors are paid and not in arrears for more than three months.

PLEASE ACKNOWLEDGE RECEIPT OF THIS LETTER to:

Office of the City Manager (attention **Ms. Ninette Botha**),
PO Box 440,
Pretoria,
0001,

after which all correspondence must be forwarded to Regional Operational and Coordination & Environmental and Agricultural Management Departments, attention Mr. Steven Macheve at telephone (012) 358 9247.

Yours faithfully



Johann Mettler
CITY MANAGER

On request, this document can be provided in another official language.



ROC 13 – 2021/22: TENDER FOR THE MAINTENANCE OF BALUSTRADES, BARRIERS, RETAINING WALLS, BOLLARDS AND STEEL STRUCTURES AS WELL AS UPDATING THE INVENTORY ON THE STREET FURNITURE MANAGEMENT SYSTEMS, AS AND WHEN REQUIRED, ON TENDERED RATES AND SUBJECT TO AVAILABLE BUDGET: THREE (3) YEAR PERIOD: WITH EFFECT FROM 01 APRIL 2023 OR NEAREST DATE

1. REGIONAL OPERATIONAL AND COORDINATION & ENVIRONMENTAL AND AGRICULTURAL MANAGEMENT:
ATTENTION: Mr. Steven Macheve
2. OFFICE OF THE CHIEF FINANCIAL OFFICER
(For your information re: Insurance)
ATTENTION: Ms. Morongwa Mokoena
3. OFFICE OF THE CITY MANAGER
ATTENTION: Mr. Aigan Williams
4. SUPPLY CHAIN MANAGEMENT
ATTENTION: Ms. Thembeke Mphefu
Ms. Jessica Marishane

For your information:

Contractor: Messrs. **SITHEMBE TRANSPORTATION AND PROJECTS (PTY) LTD**
(REGISTRATION NUMBER: **2013/029173/07**) (VENDOR: -)
12 BAUHINIA STREET
NO. 7 STANFORD OFFICE
CENTURION
0157

Contact Person: Mr. Muzi Lukhele
Cell: 073 124 1535
Tel: 012 880 3155
Fax: 086 603 7935
E-mail Address: info@sithembe.co.za



Johann Mettler
CITY MANAGER

On request, this document can be provided in another official language.

ROC 13 – 2021/22: TENDER FOR THE MAINTENANCE OF BALUSTRADES, BARRIERS, RETAINING WALLS, BOLLARDS AND STEEL STRUCTURES AS WELL AS UPDATING THE INVENTORY ON THE STREET FURNITURE MANAGEMENT SYSTEMS, AS AND WHEN REQUIRED, ON TENDERED RATES AND SUBJECT TO AVAILABLE BUDGET: THREE (3) YEAR PERIOD: WITH EFFECT FROM 01 APRIL 2023 OR NEAREST DATE

That bidder number 26, Sithembe Transportation & Projects (Pty)Ltd, Registration numbers (2013/029173/07) be recommended as follows

ITEM	DESCRIPTION	UNIT	QTY			
	SERIES 0: GENERAL			Bidder's Rate	Maximum Negotiated Rate	Award Rate
	SECTION 001: GENERAL REQUIREMENTS AND CHARGES					
LI 001.03	Excavate by hand to expose existing services, and backfill	m ³	1	2500	120	120
001.04	Compliance with the Occupational Health and Safety Act and applicable regulations					
B001.04.01	Provision of a Health and Safety Plan	Lump sum	-	15000	30000	30000



B001.04.02	Provision of a Health and Safety File	month	1	8500	600	600
B001.04.04	Provision of a safety officer (full time)	month	1	17000	15000	15000
B001.04.06	Provision of personal protective clothing and equipment	Lump sum		30000	30000	30000
B001.05.01	Community liaison officer	month	1	15197	15197	15197
B001.05.02	Percentage on item B001.05 for handling charges (max 10%)		-	10%	1519.70	1519.70
B001.06	Supply of essential and unforeseen material					
B001.06.01	Supply of essential and unforeseen material	Prov sum	-		200000	200000
B001.06.02	Percentage on item B001.6.01 for charges and profit (max10%)	%	R200,000.00		20000	20000
	SERIES 1: ANCILLARY WORK					
	SECTION 101: SITE CLEARING AND GRUBBING					
LI 101.01	Clearing and grubbing					
101.01.02	Clearing and grubbing (1m wide strip)	m ²	1	21	60	21
LI 101.02	Cutting and removing large trees with a girth-					
101.02.01	exceeding 1 m and up to and including 2 m	no	1	62	1100	62

101.02.02	exceeding 2 m and up to and including 3 m	no	1	90	1200	90
LI 101.03	Grubbing and the removal of the stumps and roots of large trees with a girth-					
101.03.01	exceeding 1 m and up to and including 2 m	no	1	350	1100	350
101.03.02	exceeding 2 m and up to and including 3 m	no	1	500	1200	500
LI 101.05	Removal and Disposal of specific elements					
101.05.01	Concrete Kerbing/Kerbing combination	m	1	50	50	50
B101.05.02	Concrete and brick elements	m ²	1	55	150	55
B101.05.02.05	Asphalt Surfacing	m ²	1	65	120	65
	SERIES 1: ANCILLARY WORK					
	SECTION 107: DAYWORKS					
LI B107.01	Labour during normal working hours					
	Monday - Saturday (07:00 -17:00)					
107.01.01	Unskilled labour	h	1	25	25	25
107.01.02	Skilled labour	h	1	40	35	35

B107.02	Extra-over item B107.01 for charges and overheads					
107.02.01	Unskilled labour	%	Rate only			
107.02.02	Skilled labour	%	Rate only	10%		10%
B107.03	Construction Equipment			10%		10%
107.03.01	Truck up to 4 ton	day	1			
107.03.02	TLB Backhoe loaders (Mass 7 - 8 ton)	day	1	2700	4122	2700
107.03.03	Generator (15kVA)	day	1	3937	4050	3937
107.03.04	Pedestrian roller (500 - 550kg, width 390mm)	h	1	450	400	400
107.03.05	Pedestrian roller (1000 - 1500kg, width 900mm)	h	1	687	250	250
107.03.06	Compressor (185 cfm) including 2 drills and hoses	h	1	5850	300	300
107.03.07	Arc Welder (200amh) with generator	h	1	500	500	500
107.03.08	Angle Grinder	h	1	250	300	250
107.03.09	Drill	h	1	150	180	150
	SERIES 5: DRAINAGE AND EROSION PROTECTION SECTION 501: SUBSURFACE DRAINS AND DRAINAGE BLANKETS					

501.01	Crushed stone					
501.01.02	Single-sized crushed stone(19mm)	m ³	1	15000	600	600
501.04	Geotextiles					
501.04.01	Bidem Grade A1 (1.3mm thick)	m ²	1	400	60	60
501.04.02	Bidem Grade A4 (2.1mm thick)	m ²	1	450	60	60
501.05	Pipes in subsurface drains					
501.05.02	160mm Ø perforated pipe	m	1	300	150	150
501.07	Concrete outlet structures for subsurface drains, including formwork	m ³	1	3300	2500	2500
501.08	Concrete caps for subsurface drainpipes	no	1	1900	800	800
	SERIES 5: DRAINAGE AND EROSION PROTECTION					
	SECTION 505: EROSION PROTECTION					
505.06	Stone pitching					
505.06.01	Plain pitching 200mm thickness	m ²	1	250	250	250
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION 606: ASPHALT BASE AND SURFACING					
606.01	Asphalt Base 150mm layers					
606.01.01	Using 4.5%, 50/70 Pen Bitumen					

609.01.01.01	Continuously graded	m ²	1	220	162	162
606.02	Asphalt surfacing 30mm layers					
606.01.01	Using 5.0%, 50/70 Pen Bitumen					
609.01.01.01	Continuously graded (Medium)	m ²	1	220	215	215
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION 607: BITUMINOUS SURFACE TREATMENTS					
607.11	Supply and installation of "Freysinet" or					
	similar approved rumble strips					
	(100mmx1000mm)					
607.11.01	9,5mm aggregate	no	1	200	150	150
607.11.01	13,2mm aggregate	no	1	200	150	150
607.11.01	19,0mm aggregate	no	1	200	150	150
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION 609: SEGMENTED PAVING					
LI 609.01	Re-instatement and construction of segmental block paving made from -					

609.01.01	50mm (200x100) Grey bevel type S-A pavers, class 25, in accordance with the Typical Standard Details of Tshwane Drawing STD 008	m ²	1	235	250	235
609.01.02	80mm (200x100) Interlocking type S-B pavers, class 25, in accordance with the Typical Standards details of of the City of Tshwane Drawing STD 008 and STD 015	m ²	1	240	250	240
LI 609.03	Re-instatement and construction of edge restraints with:					
609.03.01.01	Figure 3 Precast concrete kerb, According to Drawing no STD 007	m	1	200	200	200
609.03.01.02	Figure 7 Precast concrete kerb, According to Drawing no STD 007	m	1	200	200	200
609.03.02	In situ cast concrete, class 25, according to Drawing No STD007	m	1	200	2500	200
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION 610: CONCRETE PAVEMENTS					
LI 610.01	Re-instatement and construction of concrete pavement					

610.01.01	100mm thick with Class 25 / 19 concrete and U2 concrete finish in accordance to Drawing STD 008	m2	1	2500	2500	2500
610.01.02	125mm thick vehicle entrances with Class 25 / 19 concrete and U2 finish in accordance to Drawing STD 008	m2	1	2450	2500	2450
ITEM	DESCRIPTION	UNIT	QTY			
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION 611: GUARDRAILS					
LI 611.01	Guardrails on timber posts					
611.01.01	Galvanized	m	1	450	582.40	450
B611.01.03	Double Galvanized on 2.4m timber posts	m	1	250	1137.45	250
B611.01.04	Triple Galvanized on 2.4m timber posts	m	1	150	1638.09	150
B611.01.05	Back-to-back galvanized	m	1	260	1083.40	260
LI 611.02	Guardrails on steel posts					
B611.02.01	Galvanized (Galvanized H-section pole on concrete)	m	1	120	1657.75	120
B611.02.03	Double Galvanized (Galvanized H-section pole on concrete)	m	1	160	1965.75	160

611.03.01	Extra over items 611.01 and 611.02 for horizontally curved guardrails, factor bent to a radius of less than 150m	m	1	375	378	375
611.04	End units					
611.04.01	End wings	no	1	420	505.05	420
611.04.02	Terminal section in accordance with STD013 where single guardrail sections are used.	no	1	8900	8909.00	8900
611.04.03	Terminal section in accordance with drawing, where double guardrail sections are used	no	1	17680	17686.00	17680
B611.04.04	Bull nose	no	1	920	928	920
B611.04.05	Concrete barrier backing plate	no	1	1990	2000	1990
B611.04.06	Concrete barrier anchor plate	no	1	1990	2000	1990
B611.04.07	Concrete barrier cleat attachment	no	1	1990	2000	1990
LI 611.05	Additional guardrail posts					
611.05.01	Timber	no	1	170	312.44	170
611.05.02	Galvanized H-steel section for single guardrail	no	1	1750	4290	1750
B611.05.03	Galvanized H-steel section for double guardrail	no	1	1890	5200	1890
B611.05.04	Galvanized steel post at kerb inlets	no	1	1800	5460	1800

B611.05.05	Custom designed and manufactured galvanized steel post not specified in drawings (152mm x 152mm x 29.8kg/m H-section)	m	1	1800	1800	1800
B611.06	Reflector plates (High Intensity Prismatic reflective material)	no	1	40	45	40
LI 611.07	Dismantling existing guardrails and posts					
611.07.01	Dismantling guardrails	m	1	40	45	40
611.07.02	Removing posts	no	1	25	30	25
LI 611.09	Re-erection of dismantled guardrails with newly treated timber posts	m	1	170	180	170
B611.10	Installation of bolts and nuts and timber blocks Galvanized M16 x 350mm post bolt with	no	1	900	850	850
B611.10.01	reinforcing plate, nut, and washers.	no	1	100	150	100
B611.10.02	Galvanized M16 splice bolt with nut and washers	45	50	45	850	850
B611.10.03	Timber blocks	160	165	160		
B611.11	Re-alignment of guardrail	175	180	175	150	100
B611.12	E/O for installation of timber posts in hard material	100	150	100	50	45

	SERIES 6: ROADS AND PARKING AREAS SECTION 612: TRAFFIC SIGNS					
B612.01	Sign boards with painted background, symbols, lettering, and borders imprimatur retro-reflective material with signboards constructed from					
B612.01.03.01	Area not exceeding 5 m ² Engineering grade prismatic reflective material	m ²	1	815	820	815
B612.01.03.02	Area not exceeding 5 m ² High Intensity grade prismatic reflective material	m ²	1	815	820	815
B612.01.03.03	Area not exceeding 5 m ² High Intensity grade prismatic reflective material with galvanized frames	m ²	1	815	820	815
B612.01.03.04	Area not exceeding 5 m ² High Intensity grade prismatic reflective material profiled signs	m ²	1	815	820	815
	Area exceeding 5 m ² up to 15m ² High Intensity grade prismatic reflective material profiled signs			815	820	815

B612.01.03.05		m ²	1			
B612.01.03.06	GL 1 signs Engineering grade prismatic reflective material	m ²	1	815	820	815
B612.01.03.07	Installation of signs supplied by CoT area not exceeding 5 m ²	m ²	1	170	165	165
B612.01.03.08	Installation of signs supplied by CoT area exceeding 5 m ² up to 15m ²	m ²	1	170	165	165
LI B612.03.02	Steel Tubing - Supply and Installation of Permanent Sign Support					
B612.03.02.01	Galvanized square hollow tube (50 x 50mm x 2mm wall thickness) including base plate and top cap	m	1	155	160	155
B612.03.02.02	Galvanized square hollow tube complete with base plate to match break away footing (50mm x 50mm x 2mm wall thickness) including top cap	m	1	160	165	165
	Galvanized D section hollow tube complete with base plate to match			200	200	200

B612.03.02.03	break away footing (76mm x 2mm wall thickness) including top cap	m	1			
B612.03.02.04	Galvanized round section hollow tube (76mm Ø x 2mm wall thickness) including base plate and top cap	m	1	300	300	300
B612.03.02.05	Galvanized round section hollow tube (100mm Ø x 3mm wall thickness) including base plate and top cap	m	1	300	300	300
B612.03.02.06	Galvanized D section hollow tube (76mm Ø x 2mm wall thickness) including base plate and top cap	m	1	300	300	300
B612.03.02.07	Installation of poles supplied by CoT (when reinstalling poles, no separate payment will be made for standard signs that may have to removed and reinstalled).	m	1	115	110	110
LI B612.07.02	Dismantling of Existing Traffic Signs					

B612.07.02.01	Signs	m ²	1	59	60	59
B612.07.02.02	Poles	no	1	59	60	59
B612.07.02.03	Break-away footing	no	1	155	160	155
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION B615: BOLLARDS					
LI B615.01	Removal of any bollard	no	1	75	80	75
LI B615.02	Installation of any bollard supplied by CoT	no	1	155	150	150
LI B615.03	Supply and installation of bollards:					
615.03.01	150mm Ø reinforced concrete bollard	no	1	255	508.3	255
615.03.02	250mm Ø reinforced concrete bollard	no	1	625	739.7	625
615.03.03	250mm Ø reinforced concrete bollard with exposed aggregate surface	no	1	630	1098.5	630
615.03.04	325mm Ø reinforced concrete bollard with exposed aggregate surface	no	1	635	1300	635

615.03.05	"Helen Joseph" type powder coated steel bollards	no	1	637	1560	637
615.03.06	"Helen Joseph" removable type powder coated steel bollards	no	1	640	1950	640
615.03.07	1.5m x 125mm Ø wooden bollard CCA treated	no	1	245	250	245
615.03.08	E/O for installation of bollards in hard material	no	1	245	250	245
	SERIES 6: ROADS AND PARKING AREAS					
	SECTION B616: BALUSTRADES					
LI B616.01	Removal of any size steel stanchions:					
B616.01.01	with bolted baseplate and slip joints handrailing	no	1	115	120	115
B616.01.02	with bolted baseplate and welded handrailing ≤ 50mm Ø	no	1	115	120	115
B616.01.03	with bolted baseplate and welded handrailing > 50mm Ø ≤ 100mm Ø	no	1	160	150	150
B616.01.04	with bolted baseplate and welded handrailing > 100mm Ø	no	1	115	120	115
B616.01.05	embedded in concrete; stanchion ≤ 50mm Ø	no	1	115	120	120
B616.01.06	embedded in concrete; stanchion > 50mm Ø ≤ 100mm Ø	no	1	122	120	120

B616.01.07	embedded in concrete; stanchion > 100mm Ø	no	1	122	120	120
LI B616.02	Removal of any size steel handrailing:					
B616.02.01	with slip joints ≤ 50mm Ø	m	1	145	150	145
B616.02.02	with slip joints > 50mm Ø	m	1	155	150	150
B616.02.03	with welded handrailing ≤ 50mm Ø	m	1	169	150	150
B616.02.04	with welded hand railing > 50mm Ø ≤ 100mm Ø	m	1	155	150	150
B616.02.05	with welded hand railing > 100mm Ø	m	1	145	150	145
LI B616.03	Installation of hollow tube galvanized stanchions ≤ 50mm Ø and 2mm wall thickness with:					
616.03.01	baseplate bolted to concrete slab for slip joints ≤ 50mmØ	no	1	162	165	162
616.03.02	baseplate bolted to concrete slab and welded to handrailing ≤ 50mm Ø	no	1	161	165	161
616.03.03	baseplate bolted to concrete slab and welded to handrailing > 50mm Ø ≤ 100mm Ø	no	1	163	165	163
616.03.04	baseplate bolted to concrete slab and welded to handrailing > 100mm Ø	no	1	164	165	164

616.03.05	baseplate embedded 150mm deep in 40MPa concrete footing with handrailing slip joints $\leq 50\text{mm } \emptyset$	no	1	251	250	250
616.03.06	baseplate embedded 150mm deep in 40MPa concrete welded to handrailing $\leq 50\text{mm } \emptyset$	no	1	252	250	250
616.03.07	baseplate embedded 150mm deep in 40MPa concrete welded to handrailing $> 50\text{mm } \emptyset$	no	1	253	250	250
LI B616.04	Installation of galvanized hollow tube handrailing size as indicated:					
616.03.01	slip joints "X" $\leq 50\text{mm } \emptyset$	m	1	165	165	165
616.03.02	welded joints "X" $\leq 50\text{mm } \emptyset$	m	1			
616.03.03	welded joints "X" $> 50\text{mm } \emptyset \leq 76\text{mm } \emptyset$	m	1	155	150	150
616.03.04	welded joints "X" $> 76\text{mm } \emptyset \leq 110\text{mm } \emptyset$	m	1	161	160	160
LI B616.05	Removal of timber balustrades	m	1	179	180	179
LI B616.06	Installation of timber balustrades supplied by CoT (1m up to 1.8m high):	no	1	166	165	165
LI B616.07	Supply and Installation of timber balustrade posts:			165	165	165
616.07.01	1,0m high posts for single rail	no	1			
616.07.02	1,5m high post for double rails	no	1	155	150	150


616.07.03	1,8m long post for 3 rails	no	1	161	160	160
LI B616.08	Supply and Installation of timber balustrade horizontal elements	m	1	179	180	179
	SERIES 7: STRUCTURES					
	SECTION 701: FOUNDATIONS FOR STRUCTURES					
701.02	Excavation for structures					
701.02.01	Excavation of soft material situated in the following depth ranges:					
701.02.01.01	0 m up to 2 m vertical from natural ground level	m ³	1	145	150	145
701.02.01.02	Exceeding 2 m up to 4 m vertical from natural ground level	m ³	1	146	150	146
701.02.01.03	Exceeding 4 m up to 6 m vertical from natural ground level	m ³	1	156	160	156
701.02.01.04	Exceeding 6 m up to 8 m vertical from natural ground level	m ³	1	175	170	170
701.02.01.05	Exceeding 8 m up to 10 m vertical from natural ground level	m ³	1	179	180	179

701.02.02	Extra over subitem 701.02.01 for excavation in hard material irrespective of depth	m ³	1	200	190	190
701.05	Backfill to excavations utilizing -					
701.05.01	Material from the excavation compacted to -					
701.05.01.01	90% of modified AASHTO density	m ³	1	75	80	75
701.05.01.01	93% of modified AASHTO density	m ³	1	92	90	90
701.05.01.01	96% of modified AASHTO density	m ³	1	80	80	80
701.05.02	Imported material compacted to -					
701.05.02.01	90% of modified AASHTO density	m ³	1	245	250	245
701.05.02.01	93% of modified AASHTO density	m ³	1	250	250	250
701.05.02.01	96% of modified AASHTO density	m ³	1	248	250	248
103.01	Overhaul on material hauled outside the defined free-haul boundaries (Free-haul 1km)	m ³ - km	1	55	60	55
	SERIES 7: STRUCTURES					
	SECTION 702: FALSEWORK, FORMWORK AND CONCRETE FINISH					
702.03	Formwork class F3 surface finish					
702.03.01	Single-surface formwork					

702.03.01.01	Plane, horizontal	m ²	1	554	550	554
702.03.01.02	Plane, sloping	m ²	1	540	550	540
702.03.01.03	Plane, vertical	m ²	1	635	650	635
702.03.02	Double-surface formwork (both sides measured)					
702.03.02.01	Plane, horizontal	m ²	1	650	650	650
702.03.02.01	Plane, sloping	m ²	1	650	650	650
702.03.02.01	Plane, vertical	m ²	1	650	650	650
	SERIES 7: STRUCTURES					
	SECTION 703: STEEL REINFORCEMENT FOR STRUCTURES					
703.04	Reinforcement for -					
703.04.01	Mild steel					
703.04.01.01	Bars with an 8 mm dia	t	0.2	18000	18000	18000
703.04.01.02	Bars with an 10 mm dia	t	0.2	18000	18000	18000
703.04.02	High-yield-stress steel					
703.04.02	Bars with an 10 mm dia	t	0.5	18000	18000	18000
703.04.02	Bars with an 12 mm dia	t	0.5	18000	18000	18000
703.04.02	Bars with an 16 mm dia	t	1	18000	18000	18000

703.04.02	Bars with an 20 mm dia	t	0.5	18000	18000	18000
	SERIES 7: STRUCTURES					
	SECTION 704: CONCRETE					
704.01	Cast in situ concrete					
704.01.01	Class 20/13 concrete for post and poles were instructed by Engineer	m ³	1	2200	2000	2000
704.01.02	Class 25/19 concrete for retaining wall structures and catchwater drains etc.	m ³	1	2200	2000	2000
704.01.03	Class 30/19 concrete for new jersey barriers etc.	m ³	1	2800	2500	2500
B704.02	Manufacture, transport and install of precast concrete members "Envirowall" or Similar approved retaining blocks					
B704.02.01	Blocks up to 2m High	no	1	15	32.83	15
B704.02.02	Blocks > 2,0m ≤ 3,0m high	no	1	15	32.83	15
B704.02.03	Blocks > 3,0m ≤ 4m high	no	1	20	32.83	20
B704.02.04	Blocks > 4,0m ≤ 6m high	no	1	20	32.83	20
B704.02.05	Blocks > 6m high	no	1	25	32.83	25
B704.02.06	Base blocks	no	1	40	32.83	32.83

B704.02.07	E/O for curved walls	no	1	40	32.83	32.83
B704.02.08	E/O for colored blocks	no	1	45	9.1	9.1
704.05	Cast in situ no-fines concrete					
704.05.01	NF 19 for retaining wall structures	m ³	1	1500	1500	1500
704.08	Removal of retain blocks					
704.08.01	Removal and dispose of damaged blocks	no	1	30	30	30
704.08.02	Removal and reuse of blocks	no	1	25	20	25

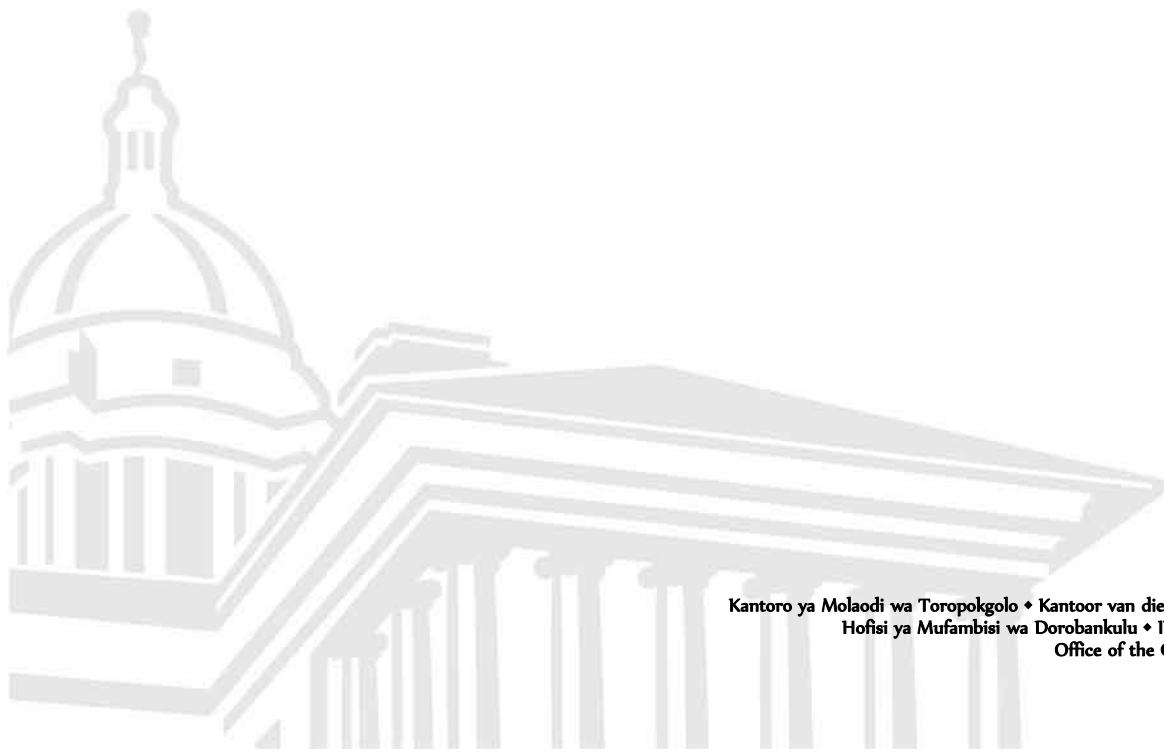

A handwritten signature in black ink, consisting of stylized, cursive letters. The signature is located in the bottom right corner of the page.